

Saturation impulses for dynamically loaded structures with finite-deflections

Ya-Pu Zhao†

LNM, Institute of Mechanics, Chinese Academy of Sciences, Beijing 100080, China

T.X. Yu‡

Department of Mechanical Engineering, The Hong Kong University of Science and Technology, Hong Kong

J. Fang‡

Department of Mechanics, Peking University, Beijing 100871, China

Abstract. The concept of "Saturation Impulse" for rigid, perfectly plastic structures with finite-deflections subjected to dynamic loading was put forward by Zhao, Yu and Fang (1994a). This paper extends the concept of Saturation Impulse to the analysis of structures such as simply supported circular plates, simply supported and fully clamped square plates, and cylindrical shells subjected to rectangular pressure pulses in the medium load range. Both upper and lower bounds of nondimensional saturation impulses are presented.

Key words: structures; rigid, perfectly plastic; finite-deflections; rectangular pressure pulse; saturation impulse; lower bounds; upper bounds.

1. Introduction

Over the past four decades, the dynamic plastic response and failure of structures subjected to large dynamic loading have been studied extensively (Jones 1989, Yu 1992) because of their practical applications. However, as structural configurations have become more varied, the requirements to determine their dynamic plastic behavior and failure have begun to increase dramatically (Zhao, *et al.* 1993, 1994b, Zhao 1994).

The concept of Saturation Impulse was put forward by Zhao, Yu and Fang (1994a), which concerned the dynamic plastic response of simply or fully clamped beams with finite-deflections subjected to rectangular pressure pulses in both medium and high ranges. To avoid ambiguity, we firstly define the term saturation impulse. The saturation impulse is the critical value after which the final deflection of the structure will not increase with further continuously applied load. In the example of a simply supported beam subjected to medium rectangular pressure pulse, this can be explained as follows. It has been shown by many experiments that the collapse

† Postdoctoral Fellow
‡ Professor

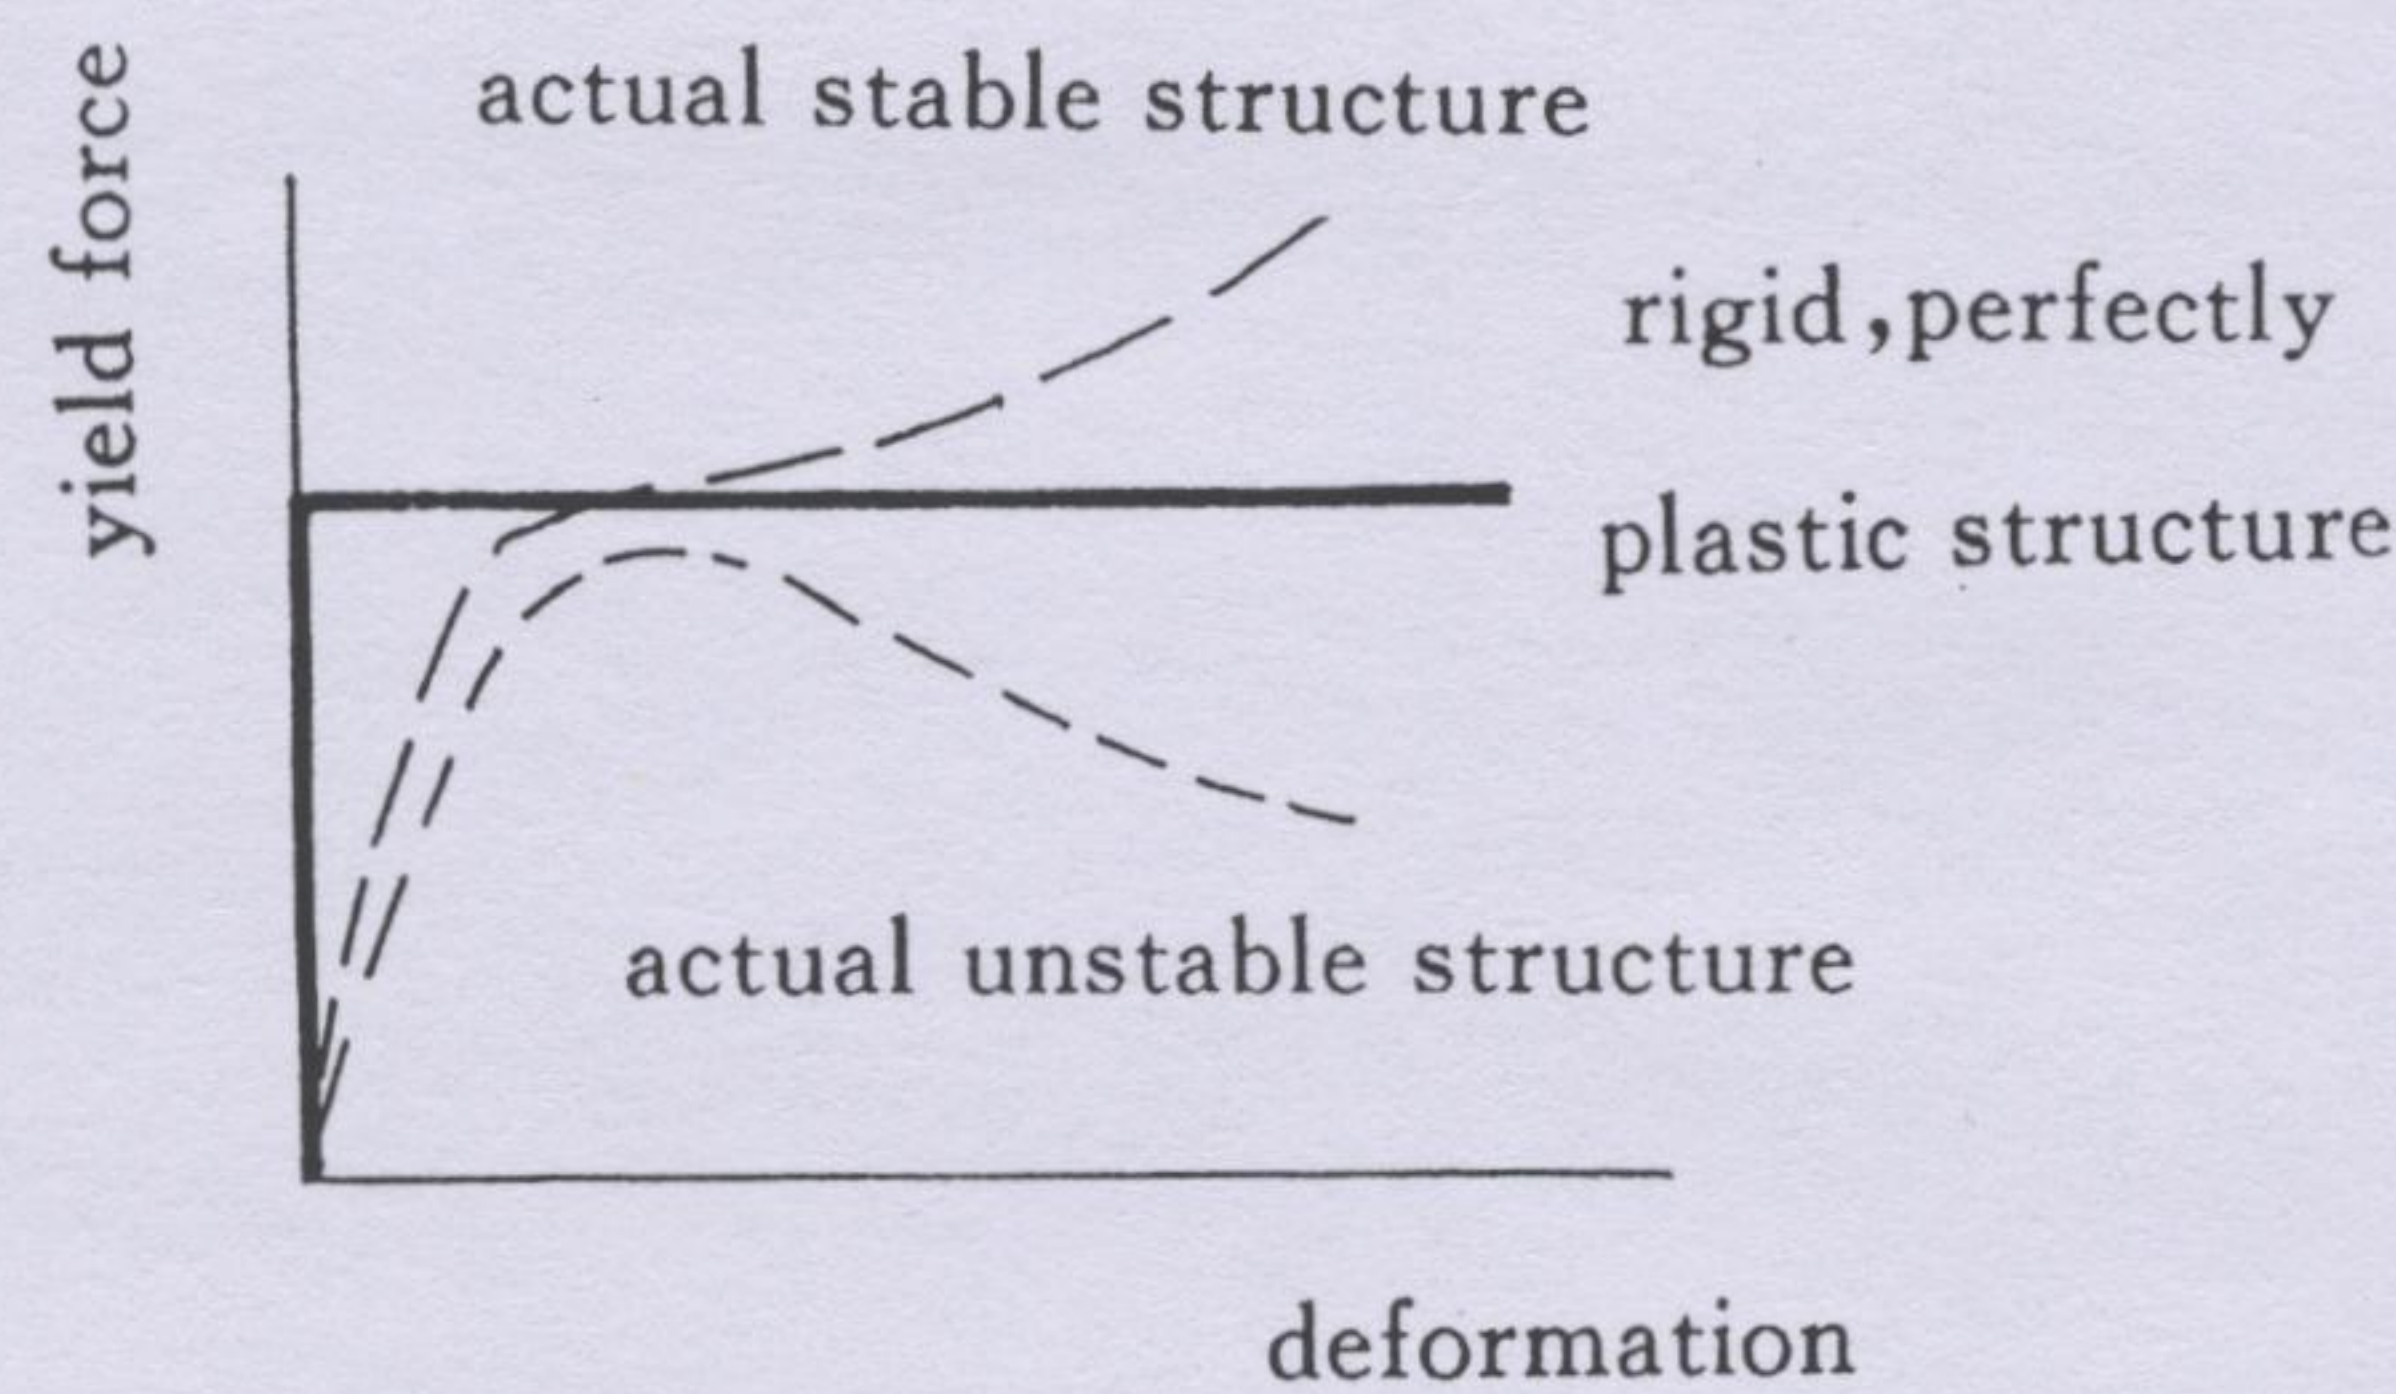


Fig. 1 Load-deformation relation for actual structures.

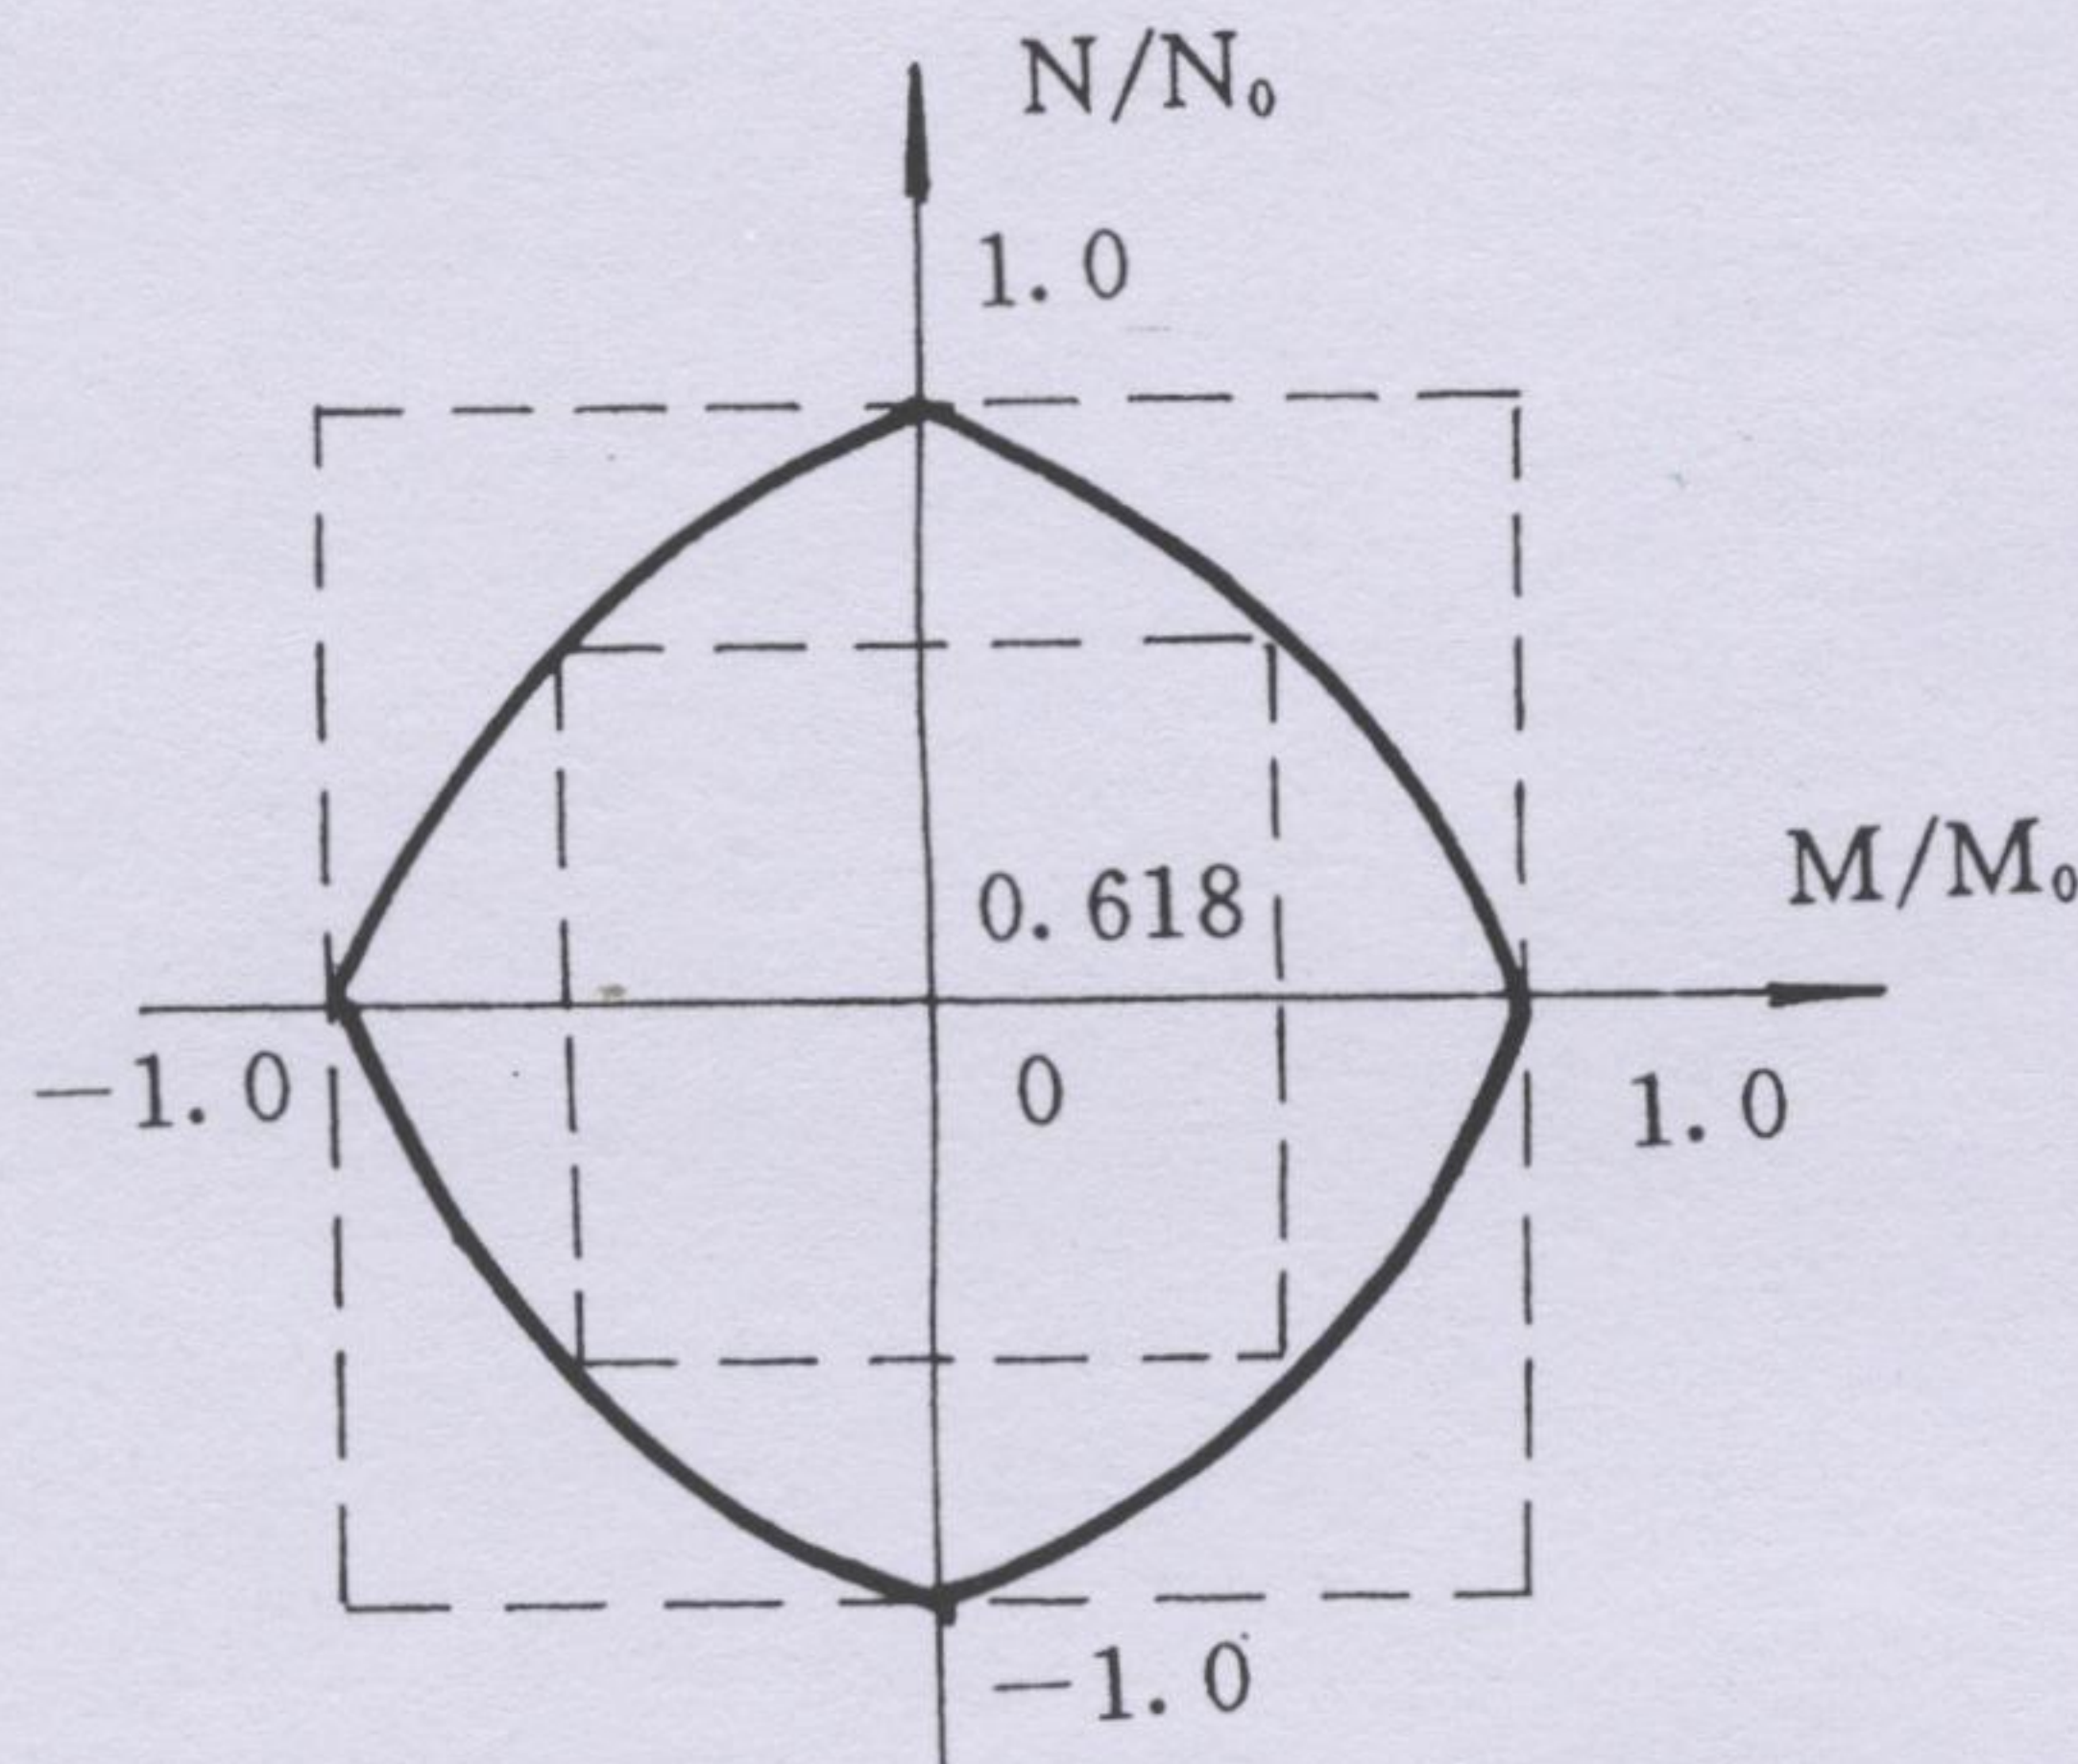


Fig. 2 Yield conditions.

loads for stable structures become larger with increase of the deflection (Yu 1989), as shown in Fig. 1, and this is why the deflection of a stable structure could not be infinite under its rigid, perfectly plastic collapse load. Once the pulse ratio is determined for a rectangular pressure pulse, an increase of the impulse means an increase in the duration of the applied load alone. When its deflection is large enough, the beam will be strengthened by the axial forces to such a extent that the continuously applied load will not produce further deflection, and then the deflection of the beam will remain constant.

This paper extends this concept to analyze other structures such as simply supported circular plates, simply supported and fully clamped square plates, and cylindrical shells subjected to rectangular pressure pulse in the medium range. The secondary effect of finite-deflections is also taken into account in each case.

2. Simply supported and fully clamped beams

Using the approximate square yield curve in Fig. 2, the lower bound of the nondimensional saturation impulse for a rigid, perfectly plastic simply supported beam subjected to uniformly distributed

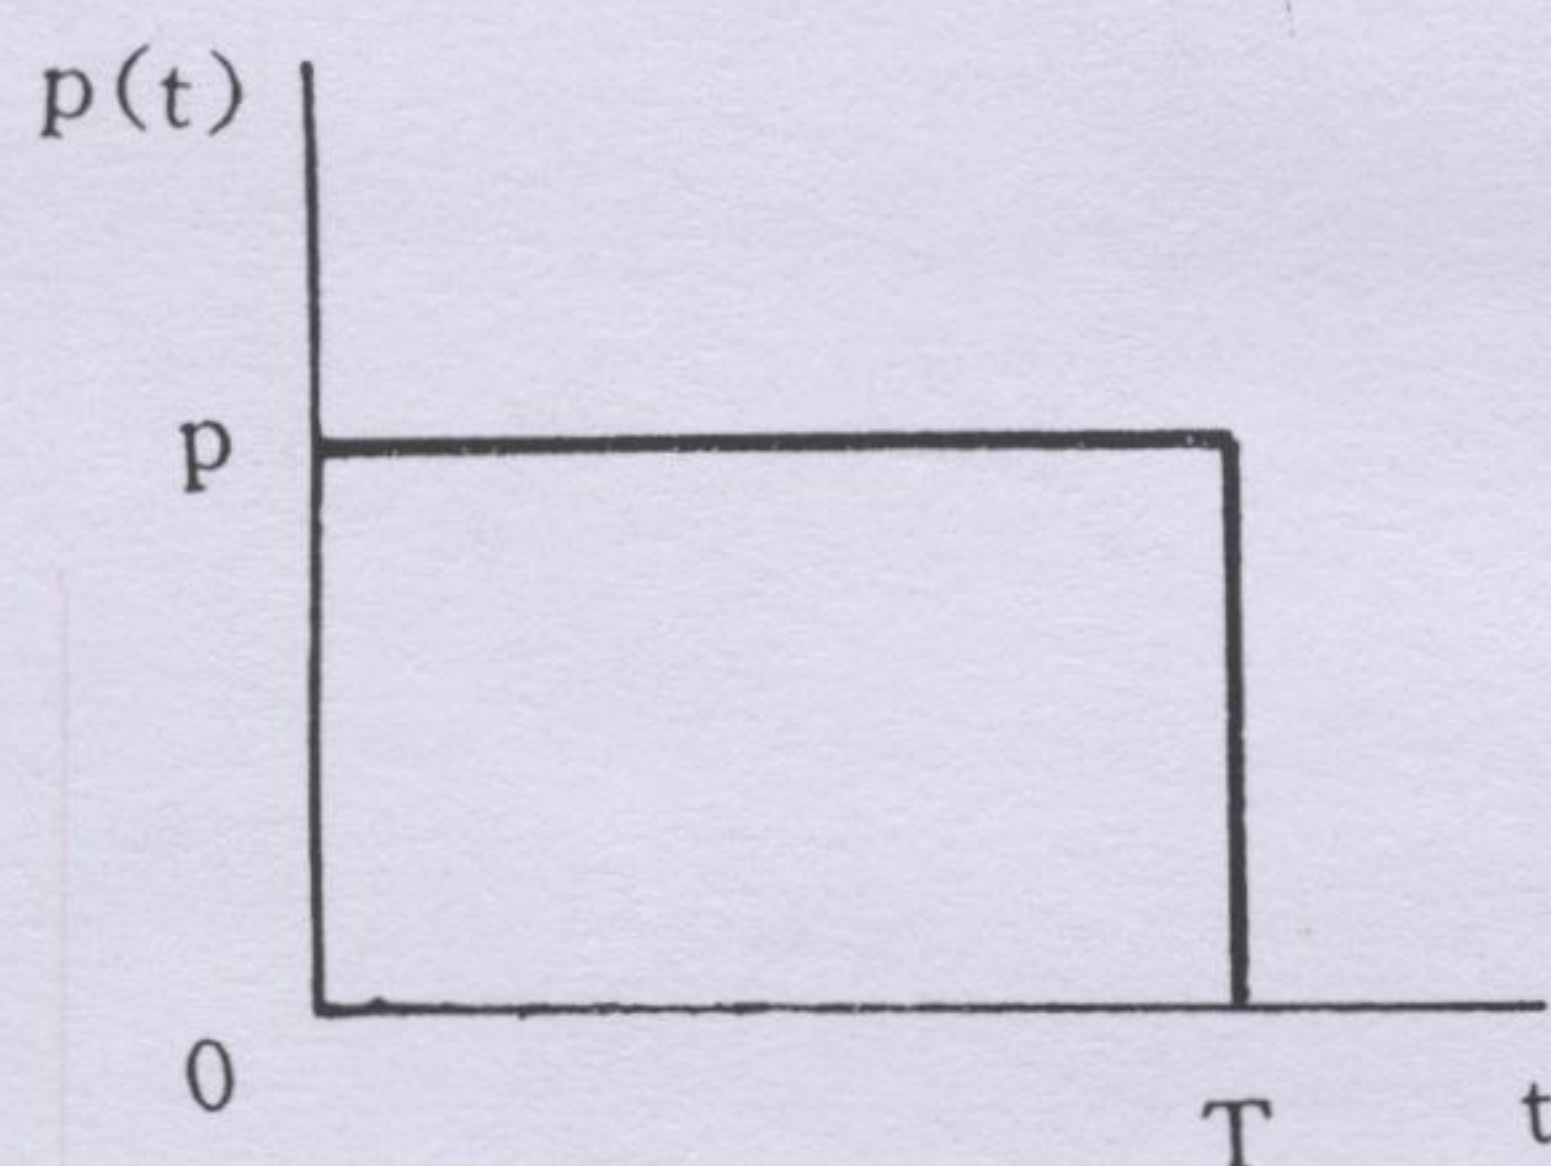


Fig. 3 Rectangular pressure pulse.

distributed medium rectangular pressure pulse (illustrated in Fig. 3) is (Zhao, *et al.* 1994a).

$$I_{low} = \frac{\pi}{\sqrt{6}} \lambda, \quad (1)$$

where $I = \frac{pT}{\sqrt{\mu H p_0}}$, $\lambda = \frac{p}{p_0}$, $p_0 = \frac{2M_0}{L^2}$ is the static collapse load of the simply supported beam, μ the mass density per unit length of the beam, and L and H are half length and thickness of the beam, respectively.

As shown in Fig. 2 that an exact yield curve relating the nondimensional bending moment and membrane force lies everywhere inside a square having sides of magnitude 2, while a square with sides of length 1.236 lies everywhere inside the exact yield curve (e.g. Jones 1967). Therefore, the actual collapse pressure p_c is given by

$$0.618 p_0 \leq p_c \leq p_0 \quad (2)$$

It is easy to show that the upper bound of the nondimensional saturation impulse is given by

$$I_{up} = \frac{1}{\sqrt{0.618}} I_{low} = 1.27 I_{low} \quad (3)$$

As shown should be noted that the above analysis incorporates the restriction

$$1 < \lambda \leq 3. \quad (4)$$

alone. To show the validity of the present model, here we only need to compare the upper and lower bounds presented in this paper to the results given by Schubak, *et al.* (1989) for pulse with $\lambda=2$, and as shown in Fig. 4. It is evident that the point becoming horizontal in the curve is just between the lower and upper bounds given by this paper.

For a rectangular pressure pulse, the magnitude of the pulse is constant, and so the lower and the upper bounds of saturation duration of pressure pulse may be expressed respectively

$$\tau_{low} = \frac{\pi}{\sqrt{6}} \quad (5a)$$

$$\tau_{up} = 1.27 \tau_{low} \quad (5b)$$

The lower and the upper bounds of the saturation impulse for a fully clamped beam subjected uniformly a rectangular pressure pulse are given by

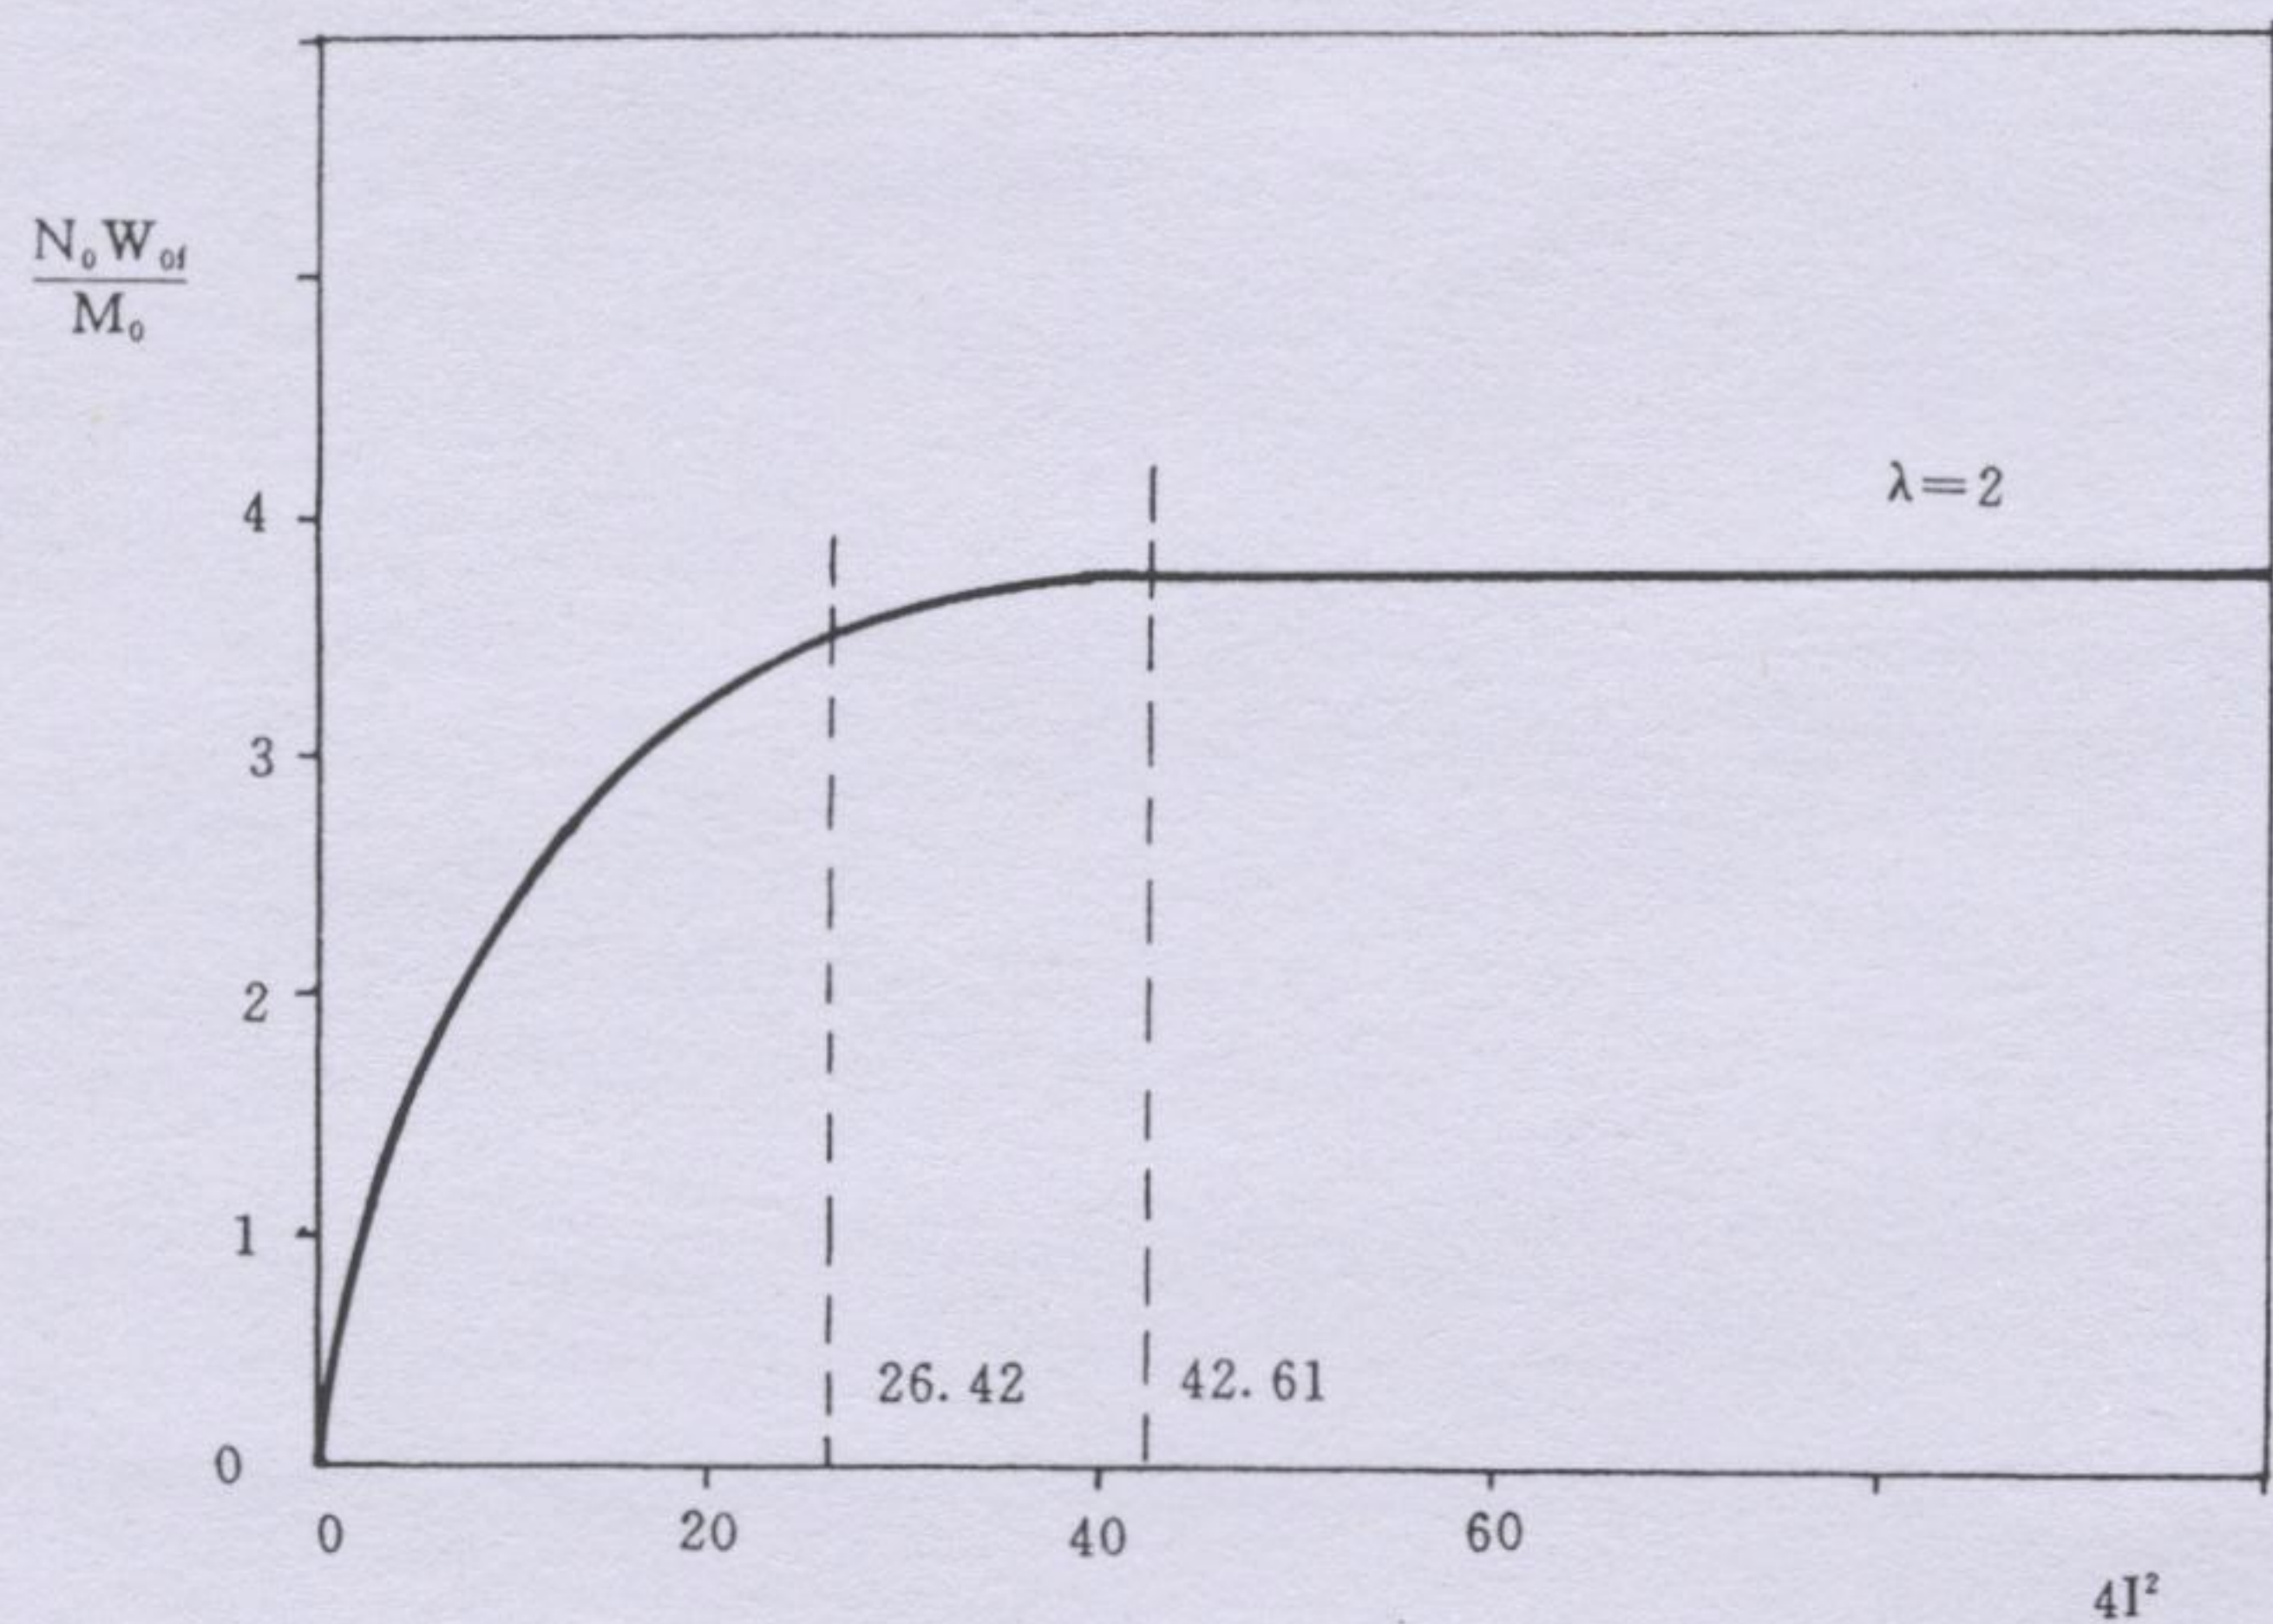


Fig. 4 Comparison for $\lambda=2$.

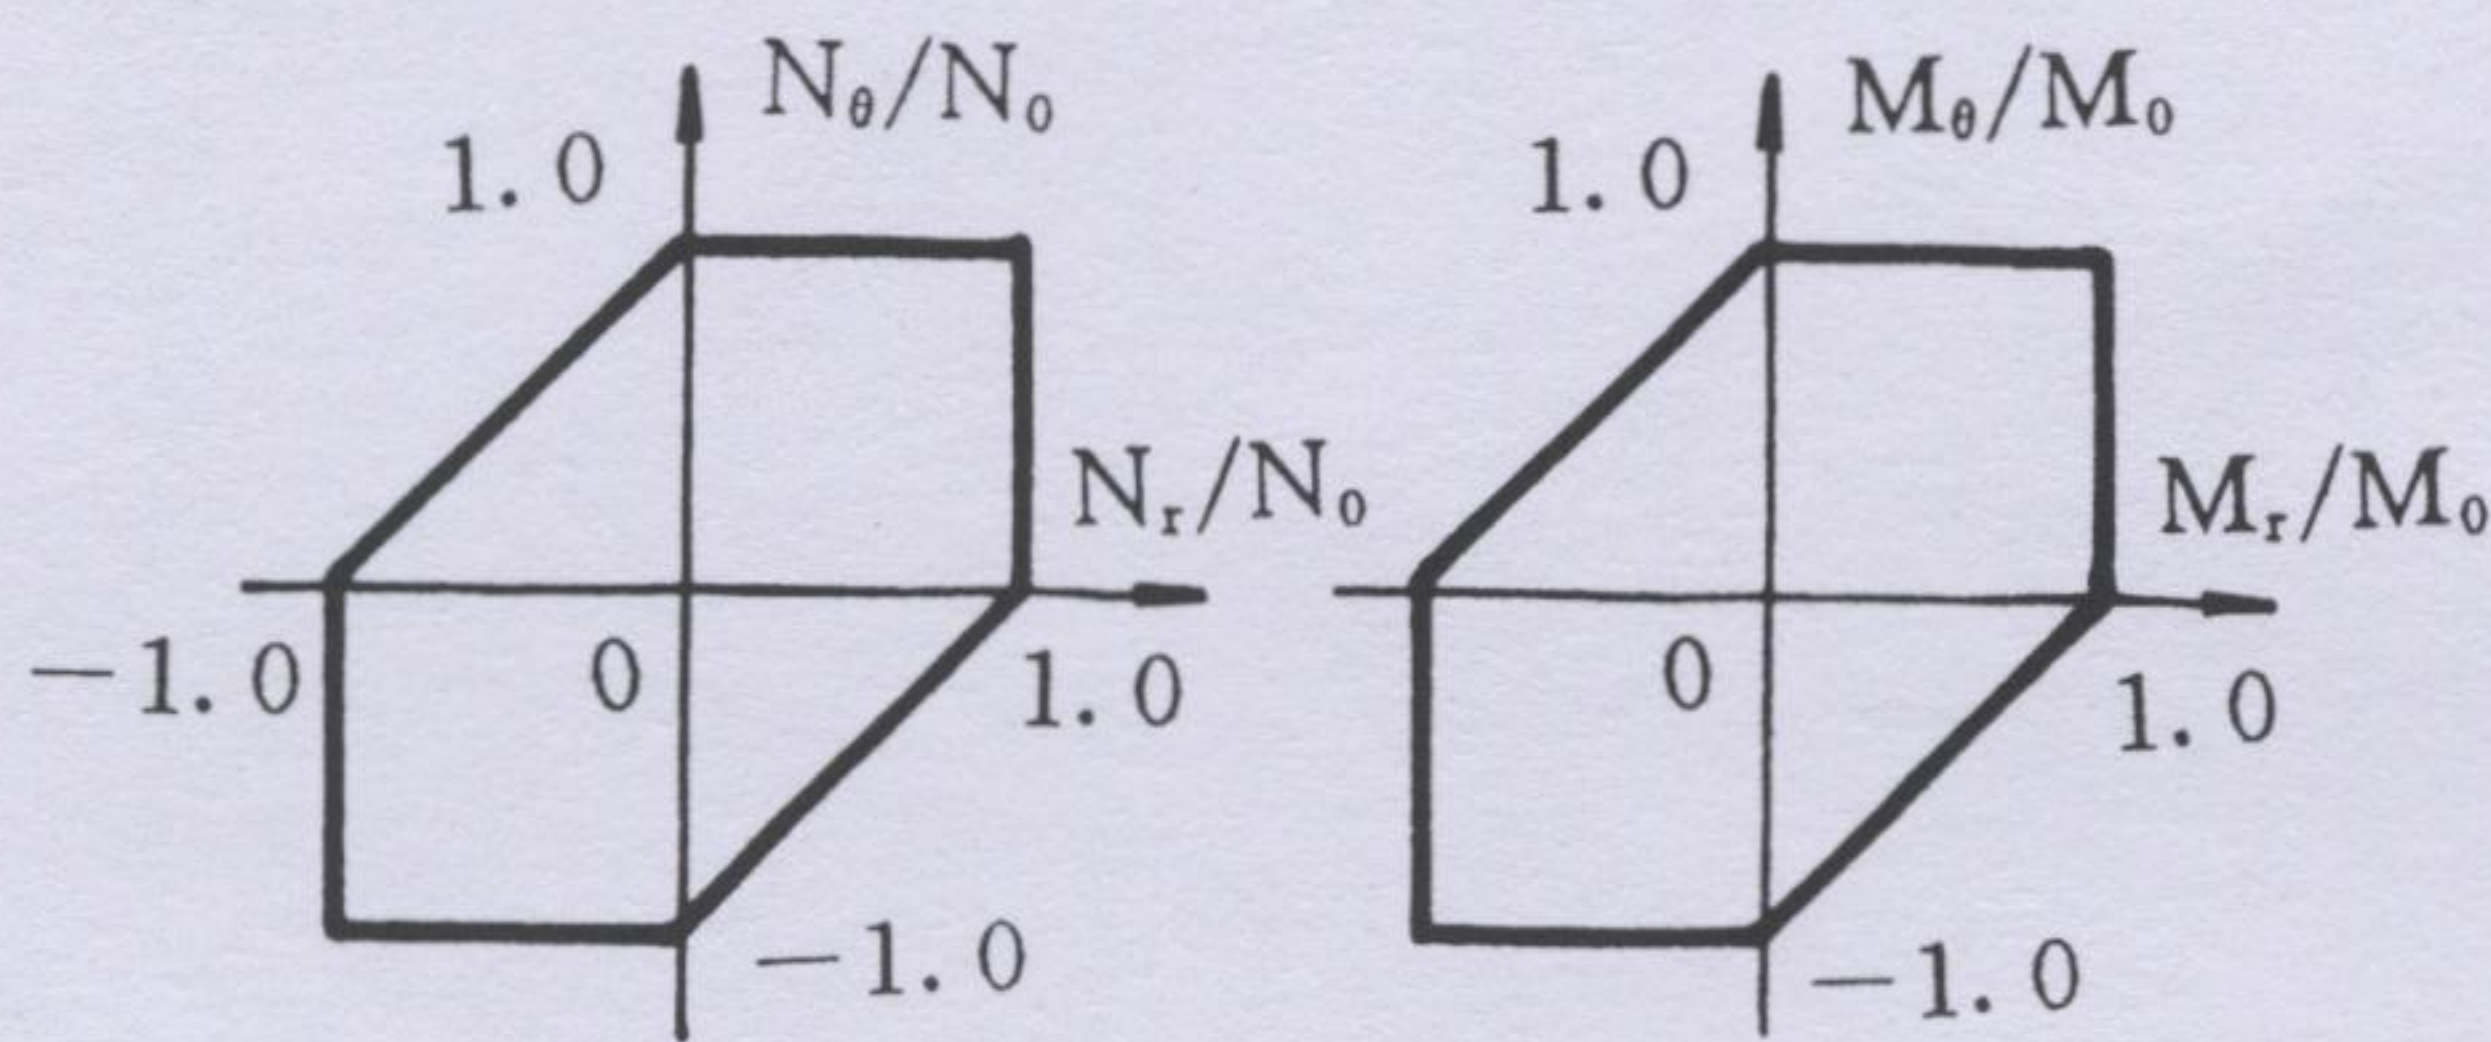


Fig. 5 Yield condition after Hodge.

$$I_{low} = \frac{\pi}{\sqrt{3}} \lambda$$
$$I_{up} = 1.27 I_{low},$$

where $I = \frac{pT}{\sqrt{\mu H p_0}}$, $p_0 = \frac{4M_0}{L^2}$ is the static collapse load of the fully clamped beam.

Similarly, the lower and the upper bounds of the nondimensional saturation duration for the clamped beam are

$$\tau_{low} = \frac{\pi}{\sqrt{3}}$$
$$\tau_{up} = 1.27 \tau_{low}$$

respectively.

3. Simply supported circular plate

If the limited interaction yield surface proposed by Hodge in 1960 (illustrated in Fig. 5) is used, the final deflection at the center of the circular plate subjected to a uniformly distributed he restrit
ounds of

medium rectangular pressure pulse is given by

$$\frac{W_m}{H} = \frac{1}{2} \left[\sqrt{1 + 2\lambda \left(1 - \cos \frac{2I}{\lambda}\right) (\lambda - 1)} - 1 \right], \quad (8)$$

where $I = \frac{pT}{\sqrt{\mu H p_0}}$ is the nondimensional impulse, $\lambda = \frac{p}{p_0}$.

Similar to Zhao, *et al.* (1994a), the lower bound of the nondimensional saturation impulse for a simply supported circular plate under medium load is given by

$$I_{low} = \frac{\pi}{3} \lambda \quad (9)$$

in the same manner as the beams, the upper bound of the nondimensional saturation impulse is taken as

$$I_{up} = 1.27 I_{low} \quad (10)$$

It should be noted that the restriction for the pulse ratio is

$$1 < \lambda \leq 2. \quad (11)$$

For a rectangular pressure pulse in medium range, the lower and upper bounds of corresponding nondimensional saturation duration of pulse are

$$\tau_{low} = \frac{\pi}{2} \quad (12a)$$

$$\tau_{up} = 1.27 \tau_{low} \quad (12b)$$

respectively.

1. Simply supported and fully clamped square plates

- (6a) Consider a rigid, perfectly plastic square plate of width $2L$ which is either simply supported
(6b) or fully clamped around the outer boundary. If the plate is subjected to a medium rectangular pressure pulse, the maximum transverse displacement at the centre is (Jones 1971).

Equation for

$$\frac{W_m}{H} = \frac{1}{2} \left[\sqrt{1 + 2\lambda \left(1 - \cos \frac{2I}{\lambda}\right) (\lambda - 1)} - 1 \right], \quad (13)$$

For a simply supported square plate, and

(7a)

$$\frac{W_m}{H} = \sqrt{1 + 2\lambda \left(1 - \cos \frac{\sqrt{2}I}{\lambda}\right) (\lambda - 1)} - 1 \quad (14)$$

- (7b) For a fully clamped square plate.

Similarly, the nondimensional saturation impulse for a simply supported square plate is

$$I_{low} = \frac{\pi}{2} \lambda \quad (15a)$$

$$I_{up} = 1.27 I_{low} \quad (15b)$$

5) is distributed The restriction for the pulse ratio is $1 < \lambda \leq 2$. Obviously, the corresponding lower and upper bounds of the nondimensional saturation duration for a rectangular pressure pulse are

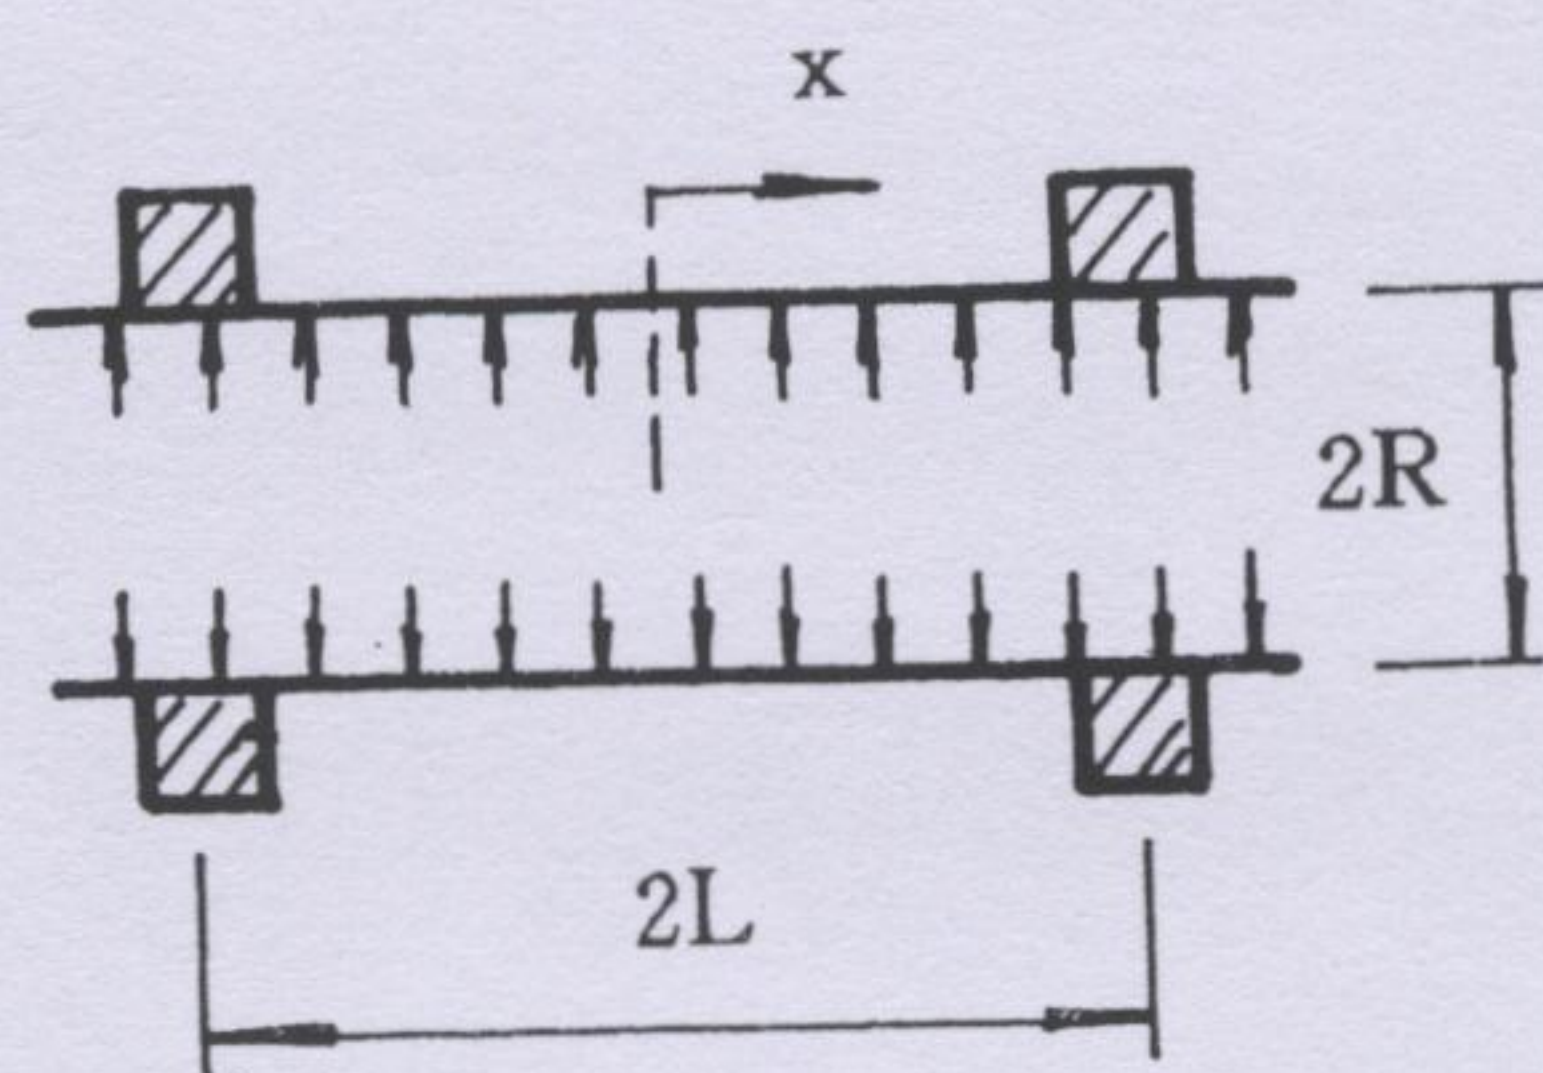


Fig. 6 Illustration for a circular cylindrical shell.

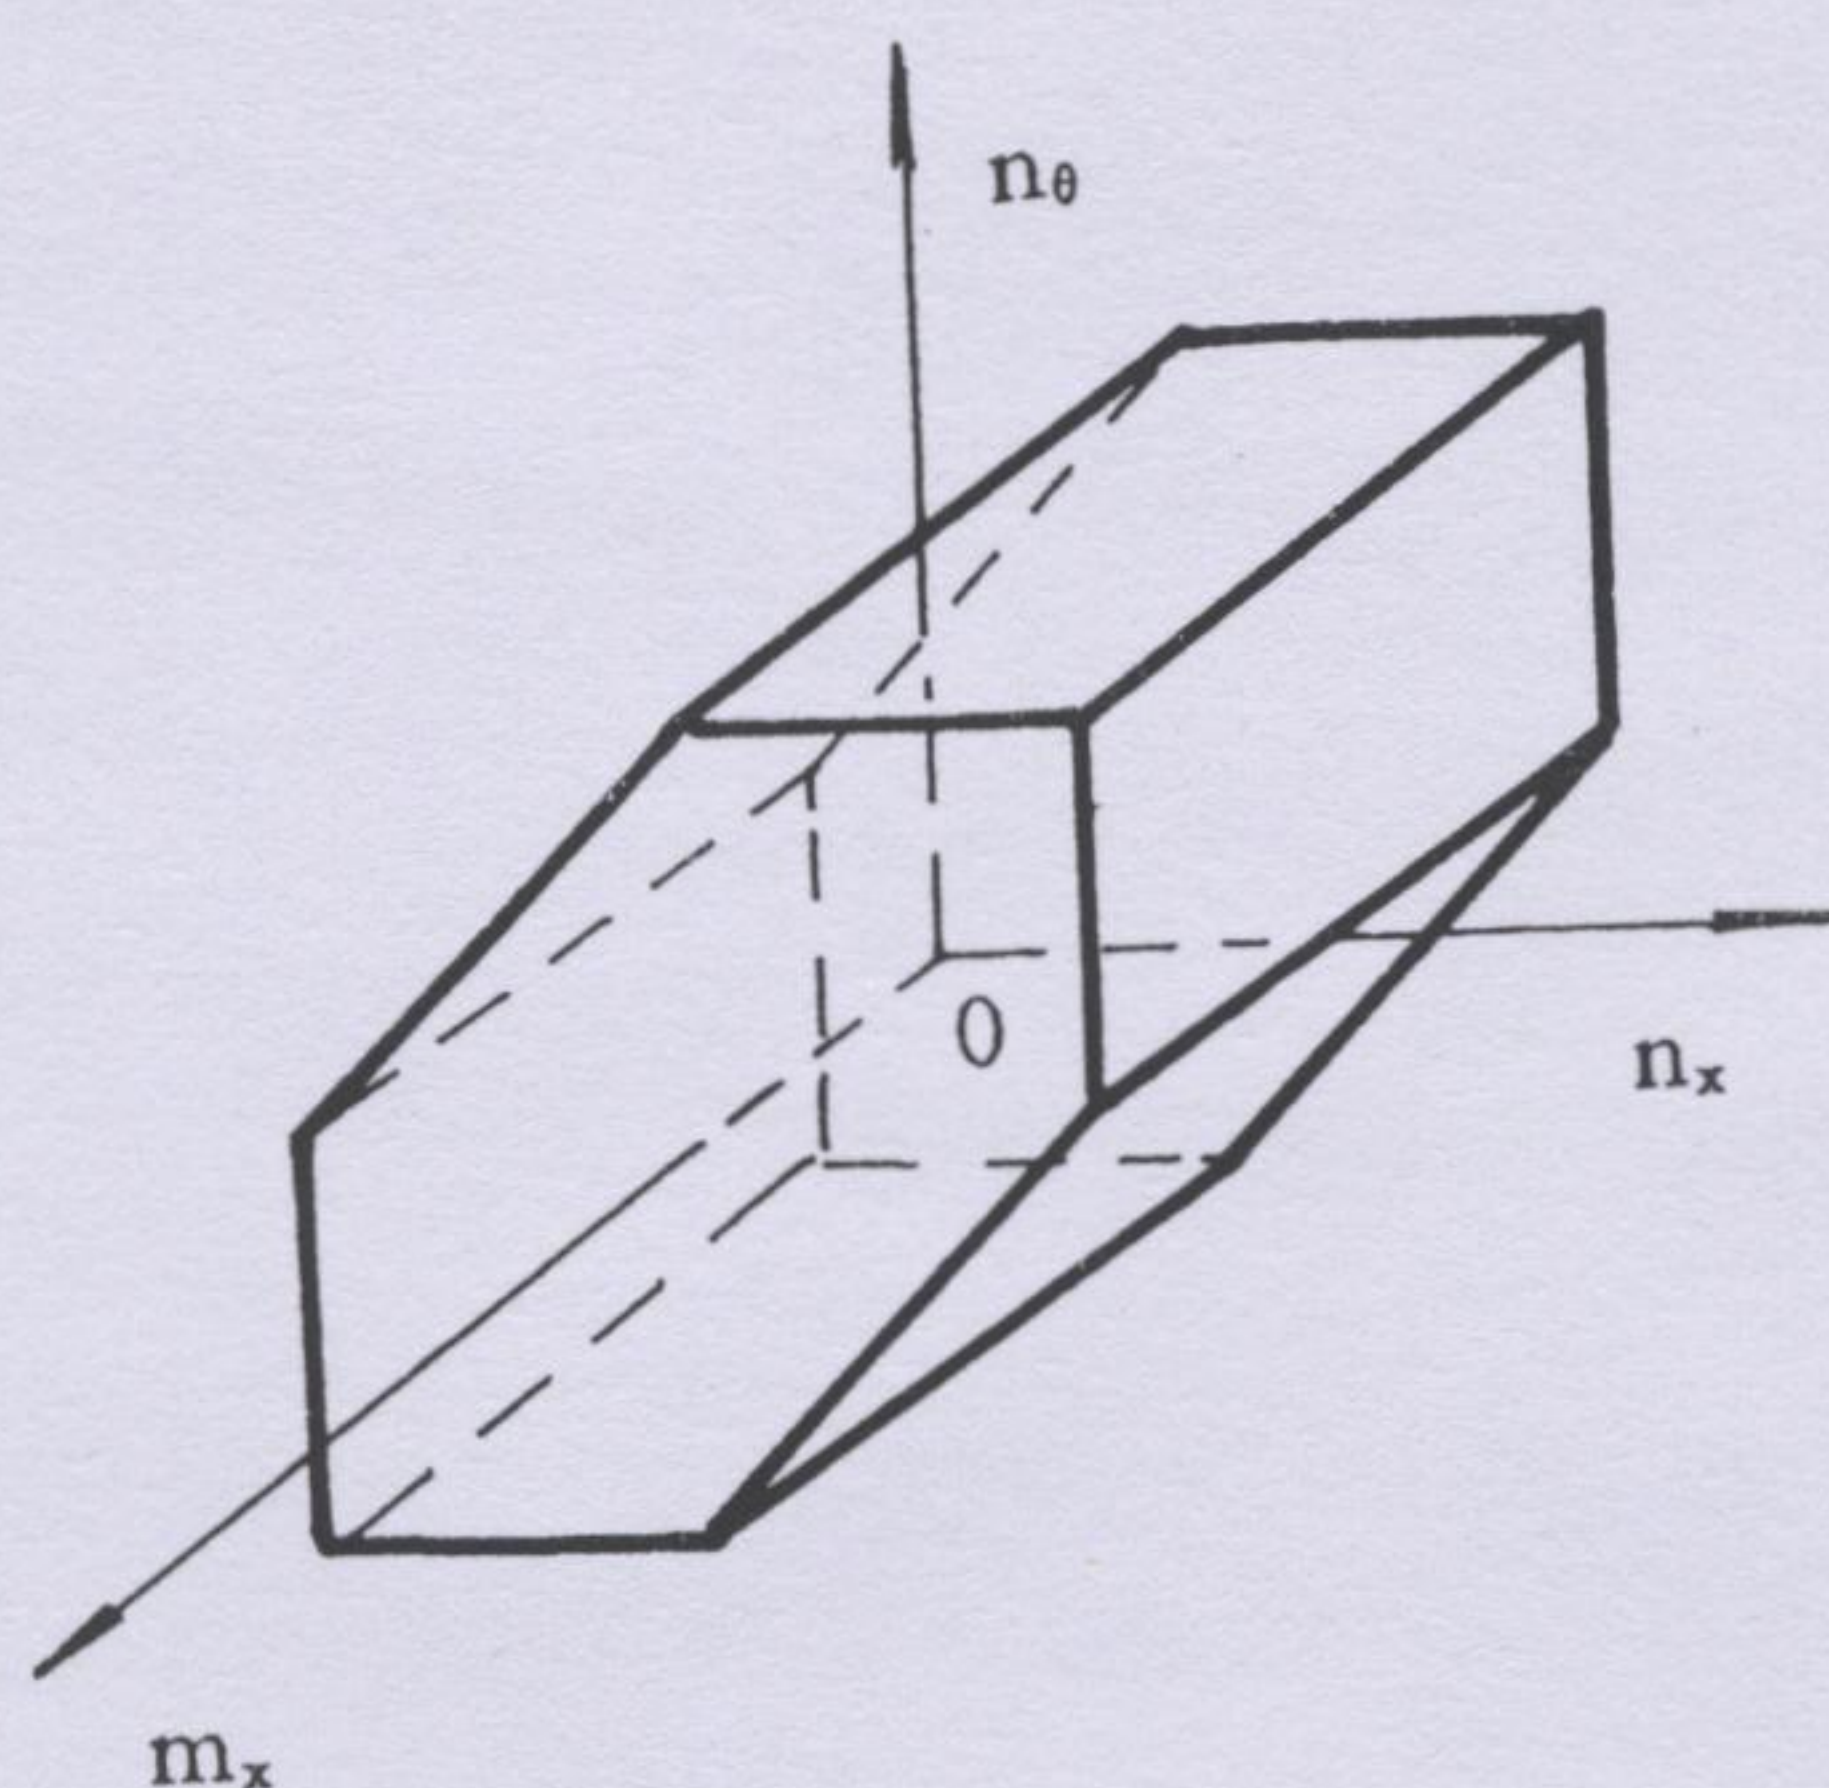


Fig. 7 Yield condition after Hodge and Shield.

$$\tau_{low} = \frac{\pi}{2}$$

$$\tau_{up} = 1.27 \tau_{low}$$

respectively.

The nondimensional saturation impulse for a fully clamped square plate is

$$I_{low} = \frac{\pi}{\sqrt{2}} \lambda.$$

$$I_{up} = 1.27 I_{low}$$

And

$$\tau_{low} = \frac{\pi}{\sqrt{2}}$$

$$\tau_{up} = 1.27 \tau_{low}$$

are the corresponding lower and upper bounds for fully clamped square plates subjected to rectangular pressure pulse in the medium range.

Cylindri

Consider
ings (Fig.
mplicity,
Fig. 7)
the mic

here $I =$

plained
Similarl

It shou

he corre
bjected

(16a)

spectiv

(16b)

Conc

This p
(17a) mply s

(17b) e used.

case
given.

(18a) ould 1
ressure

(18b) ulse sh
the s

know

We tl

Cylindrical shells

Consider an infinitely long circular cylindrical shell reinforced by equally spaced reinforcing ribs (Fig. 6) and subjected to a uniformly distributed radial rectangular pressure pulse. For simplicity, the linearized yield surface for a cylindrical shell after Hodge and Shield (illustrated in Fig. 7) is used. From the Appendix we know that the permanent transverse displacement at the midspan is

$$\left(\frac{W_0}{H}\right)_{\max} = \frac{1}{4} \left[\sqrt{1 + 2\lambda \left(1 - \cos \frac{\sqrt{6}I}{\lambda}\right)} (\lambda - 1) - 1 \right], \quad (19)$$

where $I = \frac{pT}{\sqrt{\mu H p_0}}$ is the nondimensional impulse, and the meaning of other symbols are explained in the Appendix.

Similarly, the lower and upper bounds of the nondimensional saturation impulse is

$$I_{\text{low}} = \frac{\pi}{\sqrt{6}} \lambda \quad (20a)$$

$$I_{\text{up}} = \frac{1}{\sqrt{0.618}} I_{\text{low}} = 1.27 I_{\text{low}} \quad (20b)$$

It should be noted that the following inequalities must be met

$$1 < \lambda \leq 3. \quad (21)$$

The corresponding lower and upper bounds of the saturation duration of the cylindrical shell subjected to a rectangular pressure pulse in the medium range are

$$\tau_{\text{low}} = \frac{\pi}{\sqrt{6}} \quad (22a)$$

$$\tau_{\text{up}} = 1.27 \tau_{\text{low}} \quad (22b)$$

(16a) respectively.

(16b)

Conclusions

- (17a) This paper extends the concept of Saturation Impulse to the analyses of structures such as simply supported circular plates, simply and fully clamped square plates and cylindrical shells subjected to rectangular pressure pulses in the medium range. Since approximate yield surfaces
- (17b) are used, both lower and upper bounds of the saturation impulses for such structures are presented.
- (18a) In the case of rectangular pressure pulses in the medium range, once the magnitude of the pulse is given, the saturation impulse is, therefore, equivalent to saturation duration of the pulse. It should be noted that this paper only deals with one special pulse shape, namely rectangular
- (18b) pressure pulses, and that the phenomenon of saturation impulse may exist for other kinds of pulse shape in the medium range; in these cases the saturation impulses are not equivalent to the saturation durations of the pulse.

lated to

Acknowledgements

We thank Professor R. Wang (formerly A.J. Wang) for his advice. This work was supported

by the National Natural Science Foundation of China and the Doctoral Program Foundation of Institution of Higher Education.

Notations

| | |
|-------------------|--|
| H | thickness of beam or plate |
| I | $pT/\sqrt{\mu Hp_0}$, nondimensional pressure pulse |
| L | half span of the beam and cylindrical shell, or half width of a square plate |
| m_x | M_x/M_0 |
| M_x | axial bending moment |
| M_0 | $\sigma_0 H^2/4$ |
| $n_{x,\theta}$ | $N_{x,\theta}/N_0$, nondimensional axial forces |
| $N_{x,\theta}$ | axial and circumferential bending moments |
| N_0 | $\sigma_0 H$ |
| p | magnitude of the rectangular pressure pulse |
| p_0 | collapse load |
| t_f | duration of response |
| T | pulse duration |
| u | axial displacement |
| w | transverse deflection |
| λ | p/p_0 , pulse ratio |
| μ | mass density |
| σ_0 | uniaxial yield stress |
| τ | $\sqrt{\frac{p_0}{\mu H}} T$, nondimensional duration of pressure pulse |
| $(\cdot)'$ | $\frac{\partial}{\partial x} (\cdot)$ |
| $(\cdot)^{\cdot}$ | $\frac{\partial}{\partial t} (\cdot)$ |

Subscripts:

| | |
|-----|-------------|
| low | lower bound |
| up | upper bound |

References

- Jones, N. (1967), "Influence of strain-hardening and strain-rate sensitivity on the permanent deformation of impulsively loaded rigid-plastic beams", *Int. J. Solids Structures*, **9**, 777-796.
- Jones, N. (1970), "The influence of large deflections on the behavior of rigid-plastic cylindrical shells loaded impulsively", *J. Appl. Mech.*, **37**, 416-425.
- Jones, N. (1971), "A theoretical study of the dynamic plastic behavior of beams and plates with finite deflections", *Int. J. Solids Structures*, **7**, 1007-1029.
- Jones, N. (1989), "Recent studies on the dynamic plastic behavior of structures", *Appl. Mech. Rev.*, **42**, 95-115.
- Schubak, R.B., Anderson, D.L. and Olson, M.D. (1989), "Simplified dynamic analysis of rigid-plastic beams", *Int. J. Impact Engng*, **8**, 27-42.
- Yu, T.X. (1989), *Plasticity*, Higher Education Press of China, 267-274 (in Chinese).
- Yu, T.X. (1992), "Advances in the studies on the dynamic plastic response of structures", In: *Advances in Impact Dynamics* (Wang L.L. et al. Eds.), 211-242, Chinese University of Science and Technology Press (in Chinese).

Zhao, Y.I.
unde
Zhao, Y.I.
varic
Zhao, Y.
bean
Zhao, Y.I.
plate
95.

Appendi

dynamic

This pr
in Fig. 6

where m_0
ferential
of the sh
yield stre:
It is as

The res
divided in

(1) first
(2) seco
For sim
fig. 7) is
the mediu
tatic coll:

Substitu

should
Integrati

- Chao, Y.P. (1994), "Studies on some problems of the dynamic plastic response and failure of structures under impact loading", (in Chinese), *Ph.D Thesis*, Peking University, Beijing.
- Chao, Y.P., Yu, T.X. and Fang, J. (1993), "Dynamic plastic behavior of overhanging circular plate with various support conditions", *Engng. Trans.*, **41**, 297-309.
- Chao, Y.P., Yu, T.X. and Fang, J. (1994a), "Large dynamic plastic deflection of a simply supported beam subjected to rectangular pressure pulse", *Archive of Applied Mechanics*, **64**, 223-232.
- Chao, Y.P., Fang, J. and Yu, T.X. (1994b), "Dynamic plastic shear failure analysis for an infinitely large plate with a centred cylinder under impulsive loading", *Int. J. Solids Structures*, **31**(11), 1585-1595.

Appendix

Dynamic plastic behavior of cylindrical shells to medium rectangular pressure pulse

This problem is a axisymmetrical one, and the equations of motion for a cylindrical shell illustrated in Fig. 6 are (Jones 1970)

$$n'_x + \frac{(n_x - n_\theta)}{R} w' + \frac{p w'}{N_0} - \mu \ddot{w} \frac{w'}{N_0} - \frac{\mu \ddot{u}}{N_0} = 0 \quad (\text{A1a})$$

$$m''_x + \frac{4}{H} n_x w'' + \frac{p}{M_0} - \frac{4 n_\theta}{HR} - \frac{\mu \ddot{w}}{M_0} + \frac{\mu \ddot{u} w'}{M_0} = 0, \quad (\text{A1b})$$

where $m_x = \frac{M_x}{M_0}$, $n_{n,\theta} = \frac{N_{n,\theta}}{N_0}$, M_x is the bending moment, and N_x and N_θ are axial and circumferential membrane forces, respectively. w is the transverse displacement, μ denotes the mass density of the shell per unit length. $(\)' = \frac{\partial}{\partial x} (\)$, $(\dot{\ }) = \frac{\partial}{\partial t} (\)$. $M_0 = \frac{\sigma_0 H^2}{4}$, $N_0 = \sigma_0 H$, and σ_0 is the tensile yield stress.

It is assumed that

$$\dot{u} = \ddot{u}' = \ddot{u} = 0. \quad (\text{A2})$$

The response of the cylindrical shell under a rectangular pressure pulse in the medium range is divided into two stages

- (1) first stage $t \in [0, \tau]$;
- (2) second stage $t \in [\tau, t_f]$.

For simplicity, the linearized yield surface for a cylindrical shell after Hodge and Shield (shown in Fig. 7) is used. If it is assumed that the shape of the displacement field under dynamic loading in the medium range which produces finite-deflections is the same as that developed for the corresponding static collapse load, then

$$w(x, t) = W_0(t) (1 - x/L) \text{ when } t \in [0, \tau] \quad (\text{A3a})$$

and

$$w(x, t) = W_1(t) (1 - x/L) \text{ when } t \in [\tau, t_f] \quad (\text{A3b})$$

Substituting (A3a) and (A2) into (A1a,b) and neglecting higher-order terms containing w' gives

$$m'_x = \frac{4}{H} \frac{W_0}{L} - \frac{p(t)}{M_0} x + \frac{4}{HR} x + \frac{\mu}{M_0} \ddot{W}_0 \left(x - \frac{x^2}{2L} \right) \quad (\text{A4})$$

It should be noted that $n_\theta = n_x = 1$ has been used in the derivation of (A4).

Integrating (A4) and noticing $m_x = 1$ at the midspan between two adjacent reinforcing rings yields

$$\frac{x^2}{2} + \frac{4}{HR} \frac{x^2}{2} + \frac{\mu}{M_0} \frac{x^2}{2} \left(1 - \frac{x}{3L}\right) + 1 \quad (A5)$$

$m_x = -1$ at $x=L$, we obtain the differential equation of $W_0(t)$ in

$$= \frac{3}{2\mu} [p(t) - p_0], \quad (A6)$$

$$\omega^2 = -\frac{3N_0}{\mu L^2}$$

$$= \frac{N_0}{R} + \frac{4M_0}{L^2}$$

cylindrical shell.

Equation of Eq. (A6) may be written in the following form

$$-1)(1 - \cos \omega t)(1 - x/L) \quad (A7)$$

Equation of $W_1(t)$ is

$$W_1 + \omega^2 W_1 = -\frac{3}{2\mu} p_0 \quad (A8)$$

Continuity conditions for displacements and velocity at $t=\tau$,

$\frac{dw}{dt}(t)$ is

$$\lambda(\cos \omega \tau - 1)\cos \omega t + \lambda \sin \omega \tau \sin \omega t - 1 \left\{ \left(1 - \frac{x}{L}\right) \right\} \quad (A9)$$

defined by using $w(x, t_f) = 0$, thus

$$= \frac{1}{\omega} \tan^{-1} \frac{\lambda \sin \omega \tau}{1 + \lambda(\cos \omega \tau - 1)} \quad (A10)$$

Displacement at the midspan is

$$\lambda \left(1 - \cos \frac{\sqrt{6}I}{\lambda}\right) (\lambda - 1) - 1 \quad (A11)$$

Dimensional impulse.

The ratio λ must satisfy the following inequalities

$$1 < \lambda \leq 3. \quad (A12)$$

These are both statically and kinematically admissible.

Abstract

reinforced
present p
is develop
coefficient
and not
tests have

Key words

1. Intro

Since
to take up
subjected
and have
properties
growth of
many em
s necessa
want, fin

1.1. At steel bar

This ap
that the
ally diffi
layout of

1.2. The

This ap
overs the

Professo